



—  SUITABLE FOR MODERATE FOOT TRAFFIC PROCESS FLOOR AREA



—  FOR RETAIL FLOORING

—  FOR PRODUCTION FLOORING

—  FOR OFFICE FLOORING



(Hardener)



Interior Use



Good Adhesion




Good Abrasion Resistance



Glossy Finish



Suitable For Moderate Foot Traffic Area

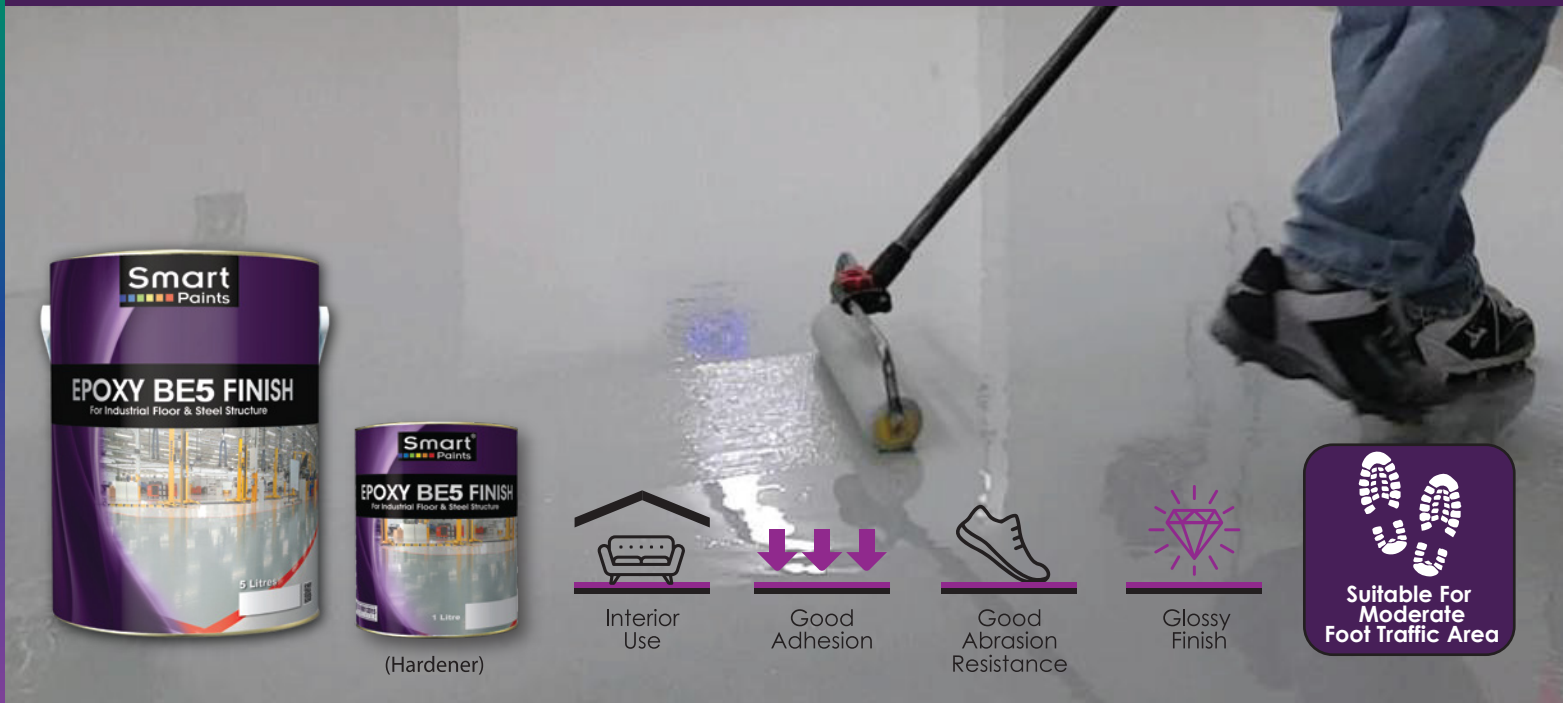



SMART EPOXY BE5 FINISH is a two pack Hi-Build Epoxy Finish for use on steel and concrete surface. It provides excellent resistant to oil, chemical, water and abrasion. Smart Epoxy BE5 Finish is suitable for machinery, flooring, concrete and steel structure. Besides, it also provide a smooth gloss finish to the machinery and flooring.

Drying Time: Dependent on temperature and humidity.

Touch Dry	Hard Dry	Theoretical Coverage
2 hours	4-6 hours	13-15m ² / Litre

Recoat

Minimum 6 hours / not more than 7 days

No. Of Coat :

2-3 coats

Pot life :

6 hours at 30°C after mixing with hardener.



Surface to be painted must dry and free from grease, dirt, and other contaminants. Smoothen surface with suitable grade sand paper and dust off before application of paints. For best result, steel surface should be grid blasted. For concrete, ensure that there is no rising dampness in order to get the best result.



BE5-1458
DARK GREEN



BE5-1460
FERN GREEN




BE5-0668
YELLOW



BE5-0632
BRIGHT BLUE



BE5-0104
EXECUTIVE GREY



BE5-1457
MISTY GREY