



EASY
DIY



NO
HACKING



EXTERIOR GRANITE

2 PACK SYSTEM POLYUREA FLOOR



For
Exterior Use



Abrasion
Resistant



Impact
Resistant



Anti-Slip



Chemical
Resistant



Excellent
Adhesion

Part A



Part B



Anti-Slip

2K TopCoat
(Clear Gloss)

2K TopCoat
(Matt)



SELF LEVELING



WATERPROOFING
COATING



UV PROTECTION

*Available in 4kg set & 20kg set





EXT 501 Light Grey



EXT 502 Medium Grey




EXT 503 Purple Grey




EXT 504 Tiny Grey



EXT 521 Dark Grey

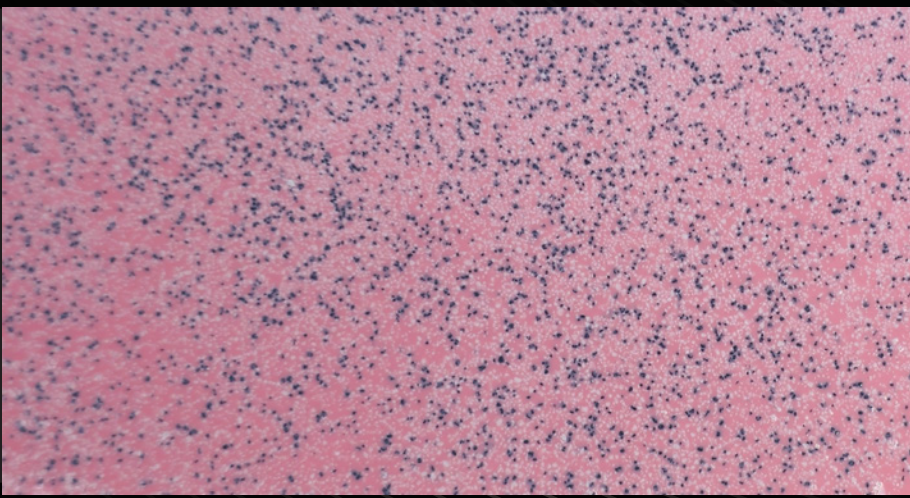


EXT 505 Pink

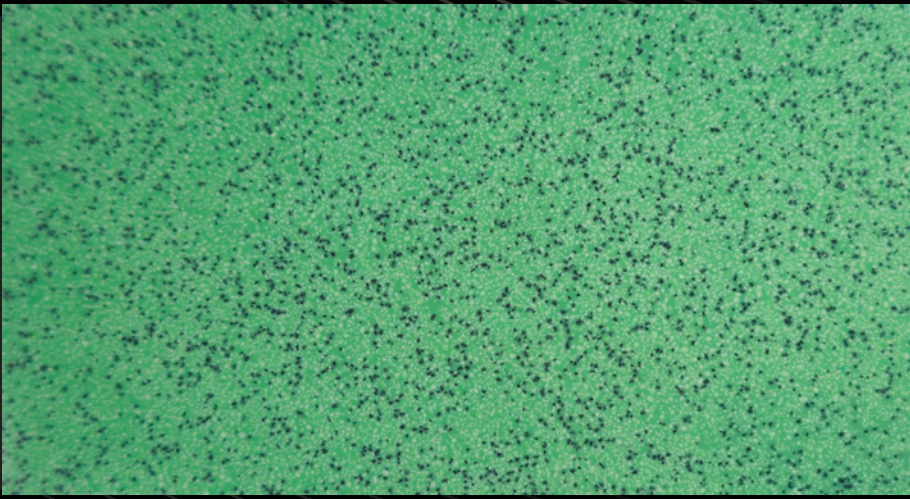


EXT 506 Green



EXT 507 Brown

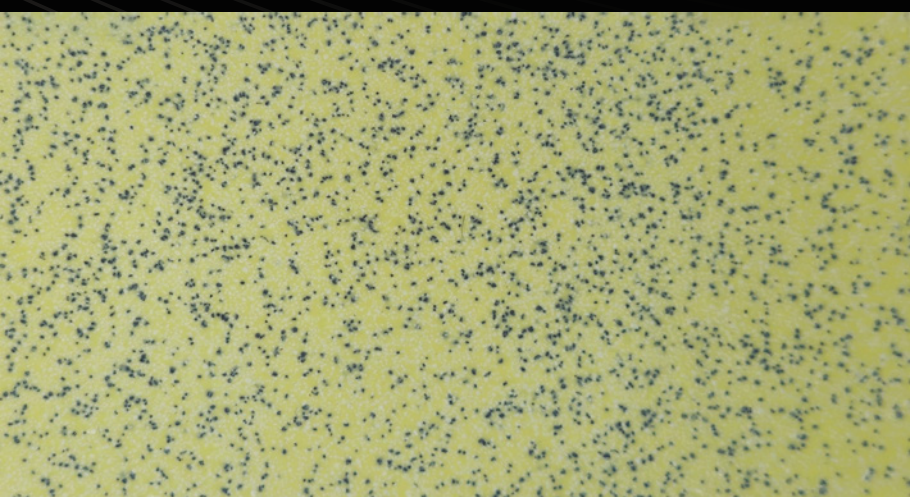

EXT 508 Yellow

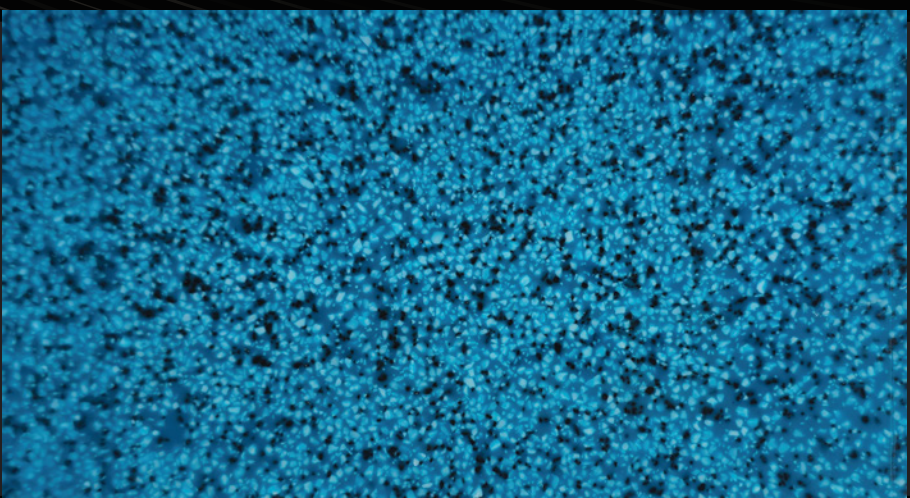

EXT 522 Blue

Tested by:



Testing Method:

1. ASTM D4060-25 Standard Test Methods for Abrasion Resistance of Organic Coatings by the Taber Abraser

2. ASTM C579-23 Standard Test Methods for Compressive Strength of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes

3. ASTM C580-23 Standard Test Method for Flexural Strength and Modulus of Elasticity of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes

4. ASTM 303: 2022 Test Method for Measuring Surface Frictional Properties Using the British Pendulum Tester

5. ASTM D2794- B3(2024) Standard Test Methods for Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact)

6. ISO 2812-1:2017 Paints and varnishes - Determination of resistance to liquids Part 1: Immersion in liquids other than water - Method A Single Phase Liquid

7. ISO 4824: 2018 - Paint and Varnishes - Pull-off test for adhesion

8. ASTM D 2486: 2017 Standard Test Methods for Scrub Resistance of Wall Paints

Pendulum Test (Anti-Slip)

ASTME 303: 2022 Test Method for Measuring Surface Frictional Properties Using the British Pendulum Tester

REPORT NO: 2026CEI045

Slip Resistant Test



WET or DRY
★★★★★



WET or DRY
★★★★★



BUATAN MALAYSIA





Scan Here



How to apply