




Smart Bellarte
Marmora

• Granite Effect •

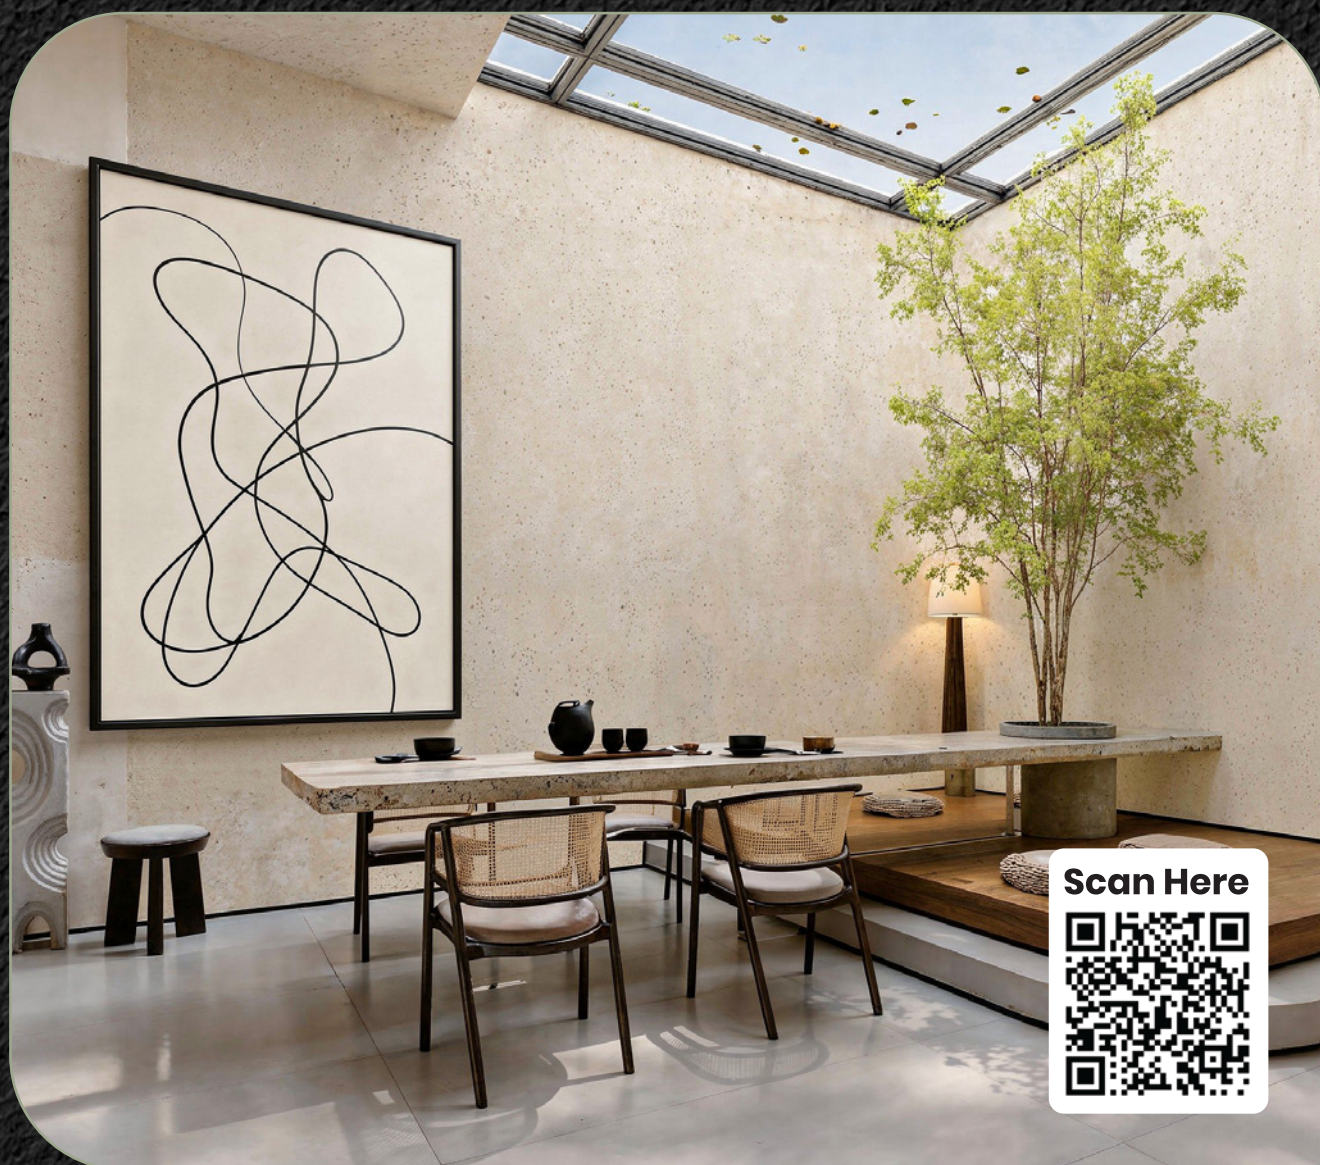

Scan Here



• LUXURY EFFECT FINISH •
where walls become art

~ *Luxury Effect Finish* where walls become art ~

Scan Here



High Hardness



Bump Resistant



Scratch Resistant



Green and
environmental
friendly

Tools

GOLD LINER
PAINTING TOOLS



7" Easy
Roller



Stainless
Steel Trowel



Stainless
Steel Scraper



Multi-Edge
Trowel (Plastic)

Optional



Stipple Brush



Multi-Function Sander Set



M28-1 Basic Ivory



M53-1 White Castle



M133-1 Sedum Flower



M31-2 Sand Dune



M8-4 White Wing



M3-2 Snow White



M7-2 White Dawn



M5-4 Bare Blush



M8-5 Orchid Scent



M9-2 White Lilac



Certified Approval




*For Interior use only



Product Features



Standard Application Procedure

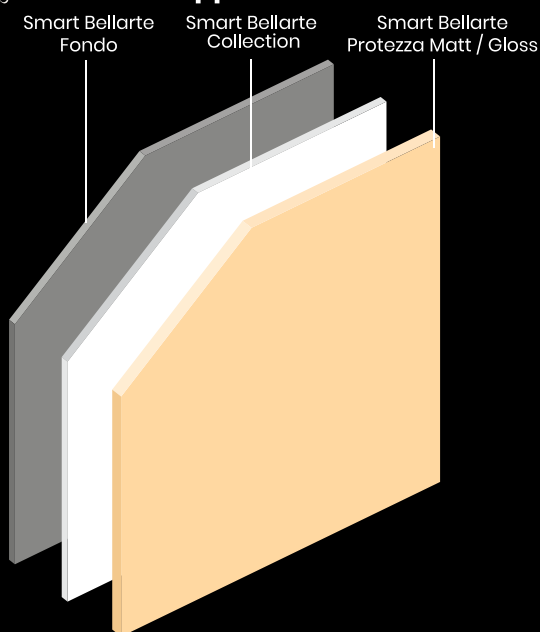

Recommended Coating System

Sealer:

Smart Bellarte Fondo

Luxury Wall Finish:

Smart Bellarte Collection

Topcoat / Finish Coat:

Smart Bellarte Protezza Matt / Gloss Finish

Application Condition

Apply only under the following conditions:

- Ambient temperature : Minimum 5°C
- Relative humidity : Maximum 85%
- Substrate moisture content : Maximum 10%

Ensure the substrate is flat, clean, sound, dry, and free from dust, grease, loose particles, and other contaminants before application.

For Exterior & Interior Use

SMART BELLARTE MARMORA is a premium natural stone-effect decorative coating that recreates the timeless beauty and texture of natural stone. It offers excellent durability, impact resistance, and long-lasting protection for both interior and exterior walls.

Theoretical Coverage

Marmora is designed to be applied in 2 coats.

Approximate Coverage:

Smooth Finish	: 2.5–3.0 kg/m ²
Random Texture Finish	: 2.5–3.0 kg/m ²
Natural Stone Finish	: 3.0–3.5 kg/m ²

Actual coverage may vary depending on substrate condition, surface profile, application method, and site conditions.

Application Data

Touch Dry	: 1–2 hours
Hard Dry	: 8–12 hours
Recoating Interval	: 5–7 hours
Full Cure	: 5–7 days

Dependent on temperature and humidity.

Application Method:

Apply using a Easy Roller, Stainless Steel Trowel, Stainless Steel Scraper & Multi-Edge Trowel.

Interior Use

SMART BELLARTE MARMORA is a premium lime-based decorative coating that creates elegant natural stone-inspired finishes. Specially formulated for direct application onto properly prepared cement-based substrates, it simplifies installation while delivering refined textures and lasting durability for interior walls.

Theoretical Coverage

Marmora is designed to be applied in 2 coats.

Approximate Coverage:

1–1.2 m²/kg (2 coats).

Actual coverage may vary depending on substrate condition, surface profile, application method, and site conditions.

Application Data

Touch Dry	: 1.5– 3 hours
Hard Dry	: 8–12 hours
Recoating Interval	: 6–12 hours
Full Cure	: 7–14 days

Dependent on temperature and humidity.

Application Method:

Apply using a Easy Roller , Stainless Steel Trowel , Stainless Steel Scraper & Multi-Edge Trowel.

Precautions

- Stir thoroughly before use. Minor sedimentation is normal.
- Read the application instructions carefully before use.
- Ensure the work area is clean and well prepared before application.
- Avoid contact with eyes. In case of contact, rinse immediately with clean water.
- Store in a cool, dry place at room temperature. Avoid freezing.
- Apply using the recommended primer and protective topcoat system to achieve the intended decorative effect.



Smart Bellarte
Marmora



*For Interior use only



SMART PAINT MANUFACTURING SDN BHD

Reg. No. 201301001177 (1031014-A)

No.9, 11 & 15, Jalan Indah Gemilang 5, Taman Perindustrian Gemilang,
81800 Ulu Tiram, Johor, Malaysia.

Tel : +607-863 9855

Fax : +607-861 5055

Email: info@smart-paints.com

Website: www.smart-paints.com